


**Material and Finish**

1. Insulator Material: L.C.P.+30% Glass Filled, UL94V-0, Color: Black
2. CAM Housing Material: L.C.P.+30% Glass Filled, UL94V-0, Color: Black
3. Contact Material: Phosphor Bronze, C5191R-EH, t=0.15mm
4. Switch Terminal Material: Phosphor Bronze, C5191R-EH, t=0.15mm
5. Contact Area Plated: 15u" Gold Plated Over 50u" Nickel
6. Solder Area Plated: 100u" Tin Plated Over 50u" Nickel
7. Switch Terminal Contact Area Plated: 2u" Gold Plated Over 50u" Nickel
8. Switch Terminal Solder Area Plated: 100u" Tin Plated Over 50u" Nickel
9. Wire Spring: PIANO Wire, SWP-A JIS G 3522
10. Shell Material: Stainless Steel SUS 301, t=0.2mm
11. Shell Solder Area Plated: 2u" Selective Gold Plated
12. CAM Pin: SUS 304, JIS G 4314, Nickel Plated
13. Current Rating: 0.5A AC/DC Max.
14. Contact Resistance: 30 mohm Max.
15. Insulation Resistance: 500 Mohm Min.
16. Dielectric Withstanding Voltage: 250V AC/DC
17. Insertion Cycles: 5,000 Cycles Min.
18. Operation Teperature: -55°C to +85°C
19. Coad Detection Switch (NORMAL OPEN)
20. Packing: Tape & Reel
21. RO = RoHS

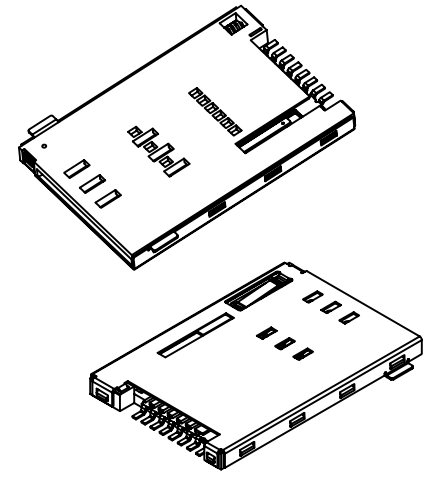



UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±1°
0.	±0.3
.0	±0.15
.00	±0.05
SCALE: NONE	UNIT: mm
DRAWN: / /	
CHECKED: / /	
APPROVED: / /	
DATE	SIZE A4
	REV. A

**Attend**  
ATTEND TECHNOLOGY INC.  
TEL:886-2-26987028 FAX:886-2-26987078

DRAWN NAME:  
SIM Card Push Push Type 1/2

PRODUCT NO.: 115A-AAA0-R  
FILE NAME: 115A-AAA0-R

REV.	DESCRIPTION	DATE
1		
2		
3		

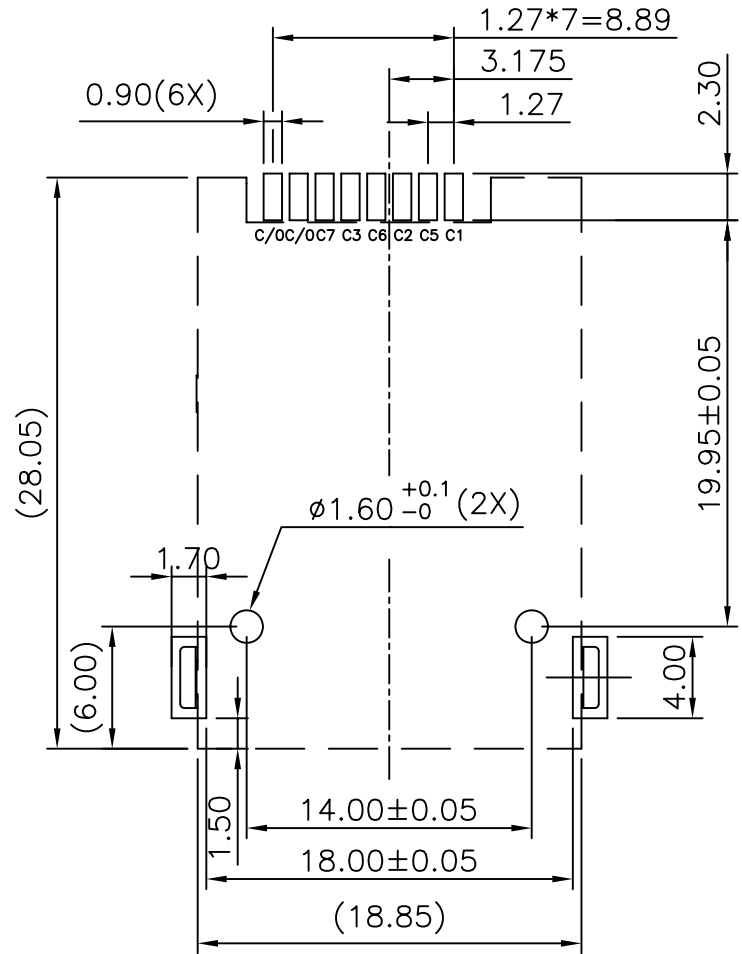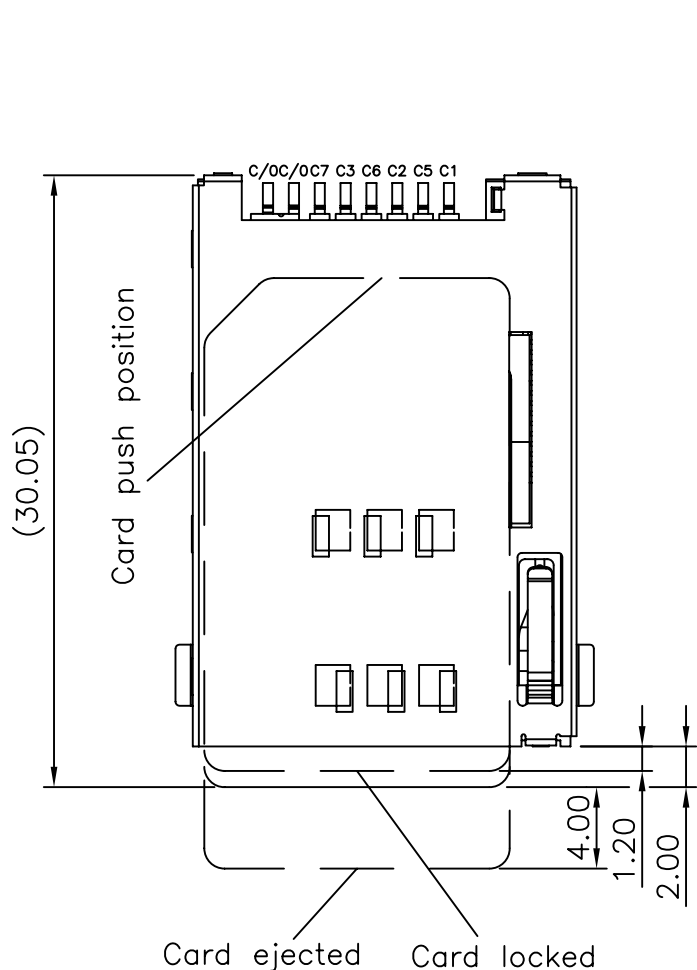

RECOMMENDED P.C.B LAYOUT

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±1°
0.	±0.3
.0	±0.2
.00	±0.15

**Attend**  
 ATTEND TECHNOLOGY INC.  
 TEL:886-2-26987028 FAX:886-2-26987078

SCALE:	NONE	UNIT:	mm
DRAWN:	TERRY	/	/
CHECKED:		/	/
APPROVED:		/	/
DATE	⊕	SIZE	A4
		REV.	A

DRAWN NAME:	SIM Card Push Push Type	2/2
PRODUCT NO.:	115A-AAA0-R	
FILE NAME:	115A-AAA0-R	

REV.	DESCRIPTION	DATE